


EXHAUST
3" THREADED
PIPE FLANGE


INLET
2" THREADED PIPE FLANGE

FACE OF
FLYWHEEL


2-1/2 P.D. — 6/8 PITCH
20 P.A.
PINION

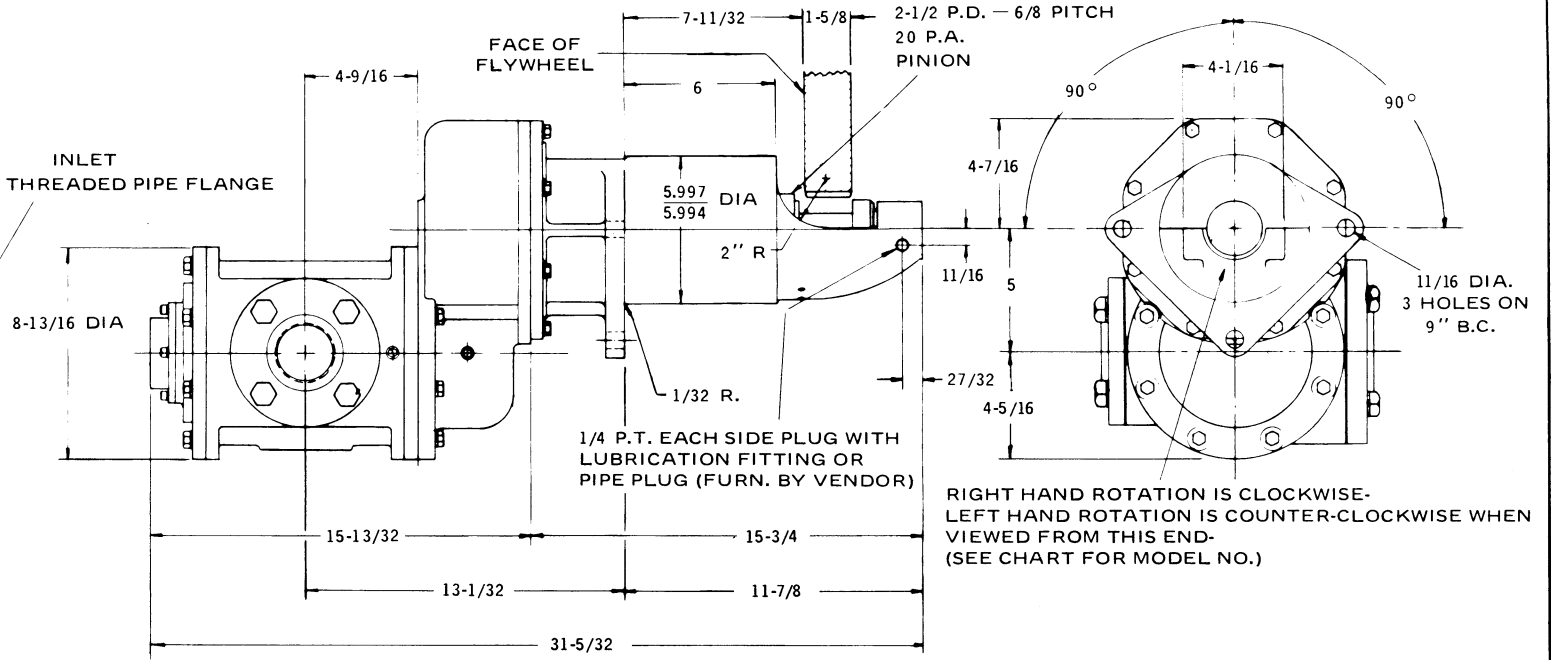

POSITION OF MOUNTING FLANGE-VIEWED FROM FLYWHEEL END


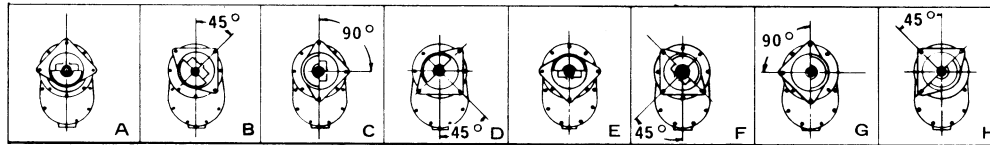


POSITION OF PRESSURE INLET-VIEWED FROM MOTOR HOUSING END

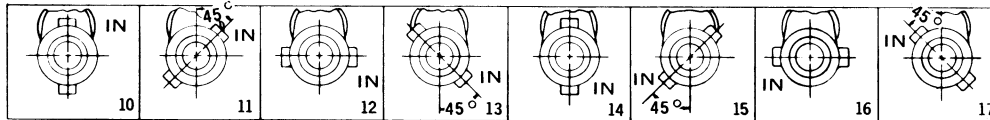

M4012GB SERIES

HEAT TR.	MATERIAL	SCALE	DATE	DESIGNED	APPROV.
		1/2"	3-2-71		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
FRACTIONS: 1/16 ANGULAR: 1°					
4012-6002					

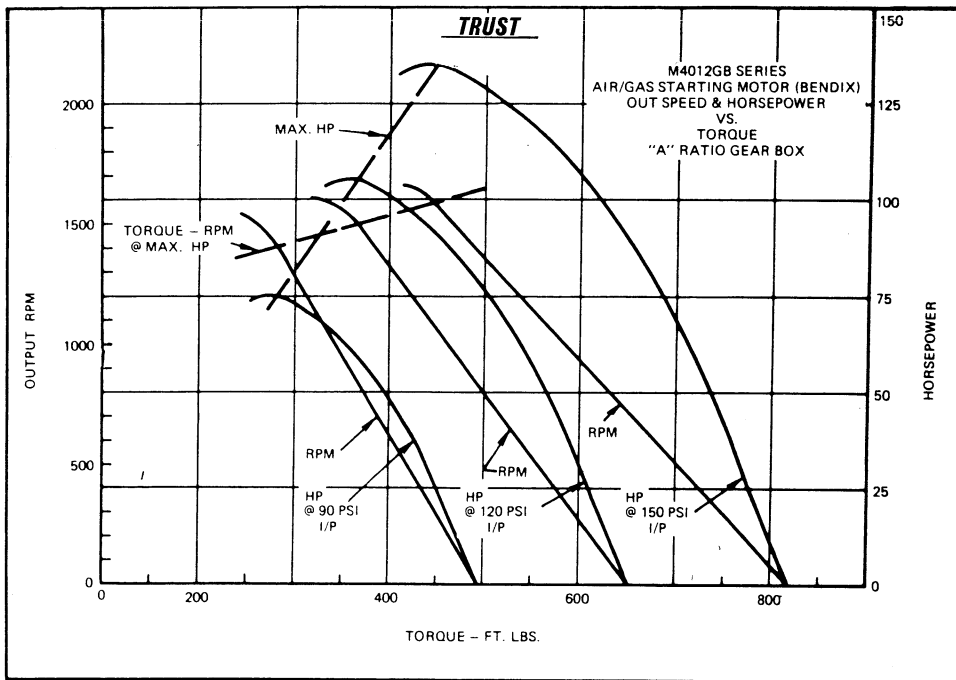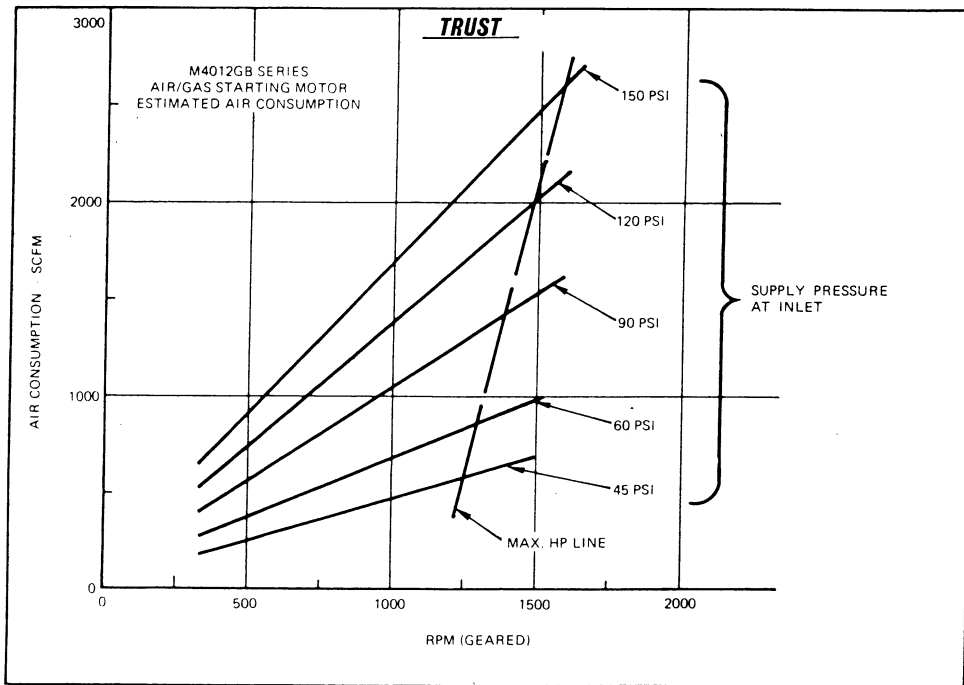

BENDIX DRIVE

15 Tooth Pinion
6/8 (Standard) Pitch
2.5 In. Pitch Diameter
.270 In. Tooth Depth

GEAR RATIOS AVAILABLE

"A" - 3 : 1
"B" - 2 : 1
"C" - 1.50 : 1
"D" - 1.14 : 1